

EXPOSED FIRE DEPT INLET CONNECTIONS — CLAPPER TYPE

POTTER-ROEMER



A Division of Smith Industries, Inc.

THREE-WAY WITH TRIPLE CLAPPERS

FUNCTION: Used as an auxiliary inlet connection, providing 750 GPM/2839 lpm minimum (Ref. NFPA 14) to supplement the fire protection water supply. Drop clappers provide unobstructed waterway. Exposed design feature is an economical method of satisfying fire dept inlet connections.

REGULARLY FURNISHED: Cast brass three-way inlet body, drop clappers and pin lug swivels. Size and outlet location as selected by model number. Lettering as selected.

OPTIONAL FINISHES:

- B Polished Brass
- C Rough Chrome Plated
- D Polished Chrome Plated


LETTERING AVAILABLE:

AUTO SPKR
STANDPIPE

SPECIFY: Thread and lettering



5740 & 5741




5745 & 5746



5751-5754



5751-F to 5754-F

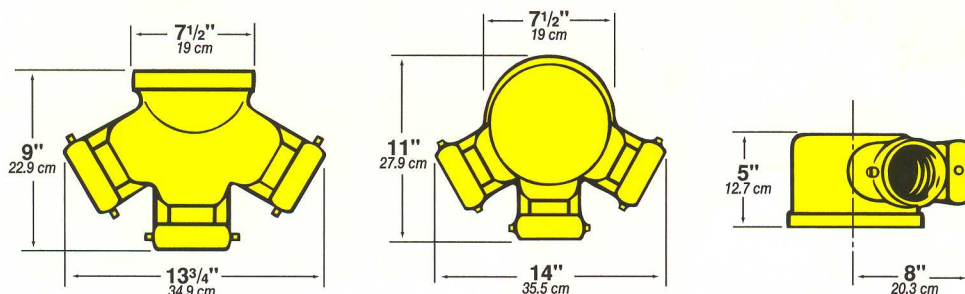

Back Outlet

Angle Outlet

Model

Size

5740 4" x 2 1/2" x 2 1/2" x 2 1/2" / 10.2 x 6.4 x 6.4 x 6.4 cm
5741 6" x 2 1/2" x 2 1/2" x 2 1/2" / 15.2 x 6.4 x 6.4 x 6.4 cm

Model

Size

5745 4" x 2 1/2" x 2 1/2" x 2 1/2" / 10.2 x 6.4 x 6.4 x 6.4 cm
5746 6" x 2 1/2" x 2 1/2" x 2 1/2" / 15.2 x 6.4 x 6.4 x 6.4 cm

TWO-WAY WITH DOUBLE CLAPPERS WITH PLATE AND PLUGS

FUNCTION: Used as an auxiliary inlet connection, providing 500 GPM/1892 lpm minimum (Ref. NFPA 14) to supplement the fire protection water supply. Drop clappers provide unobstructed waterway. Plate identifies and enhances appearance of inlet connection.

REGULARLY FURNISHED: Cast brass two-way inlet body with drop clappers, pin lug swivels and plugs and chains. Cast brass round wall plate with lettering as selected. Outlet and inlet size as selected by model number.

OPTIONAL FINISHES:

- B Polished Brass
- C Rough Chrome Plated
- D Polished Chrome Plated


VARIATION:

—F Sillcock Flange Plate with Sillcock


LETTERING AVAILABLE:

AUTO SPKR
STANDPIPE
DRY STANDPIPE
AUTO SPKR STANDPIPE

SPECIFY: Thread and lettering

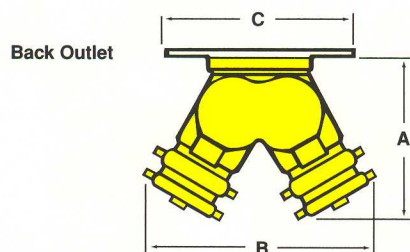

Back Outlet



Model No.	Size	UL Listed	FM Approval	A in. cm	B in. cm	C in. cm	D in. cm	E in. cm
5751	4 x 2 1/2 x 2 1/2 10.2 x 6.4 x 6.4	YES	YES	8 1/2 21.5	12 1/2 31.7	9 1/4 24.7	8 20.3	14 35.5
5752	6 x 2 1/2 x 2 1/2 15.2 x 6.4 x 6.4	NO	NO	10 1/2 26.6	11 3/4 29.8	12 30.4	9 22.9	16 1/2 41.9
5753	4 x 3 x 3 10.2 x 7.6 x 7.6	NO	YES	10 1/2 26.6	12 1/2 31.7	9 1/4 24.7	8 20.3	14 35.5
5754	6 x 3 x 3 15.2 x 7.6 x 7.6	YES	NO	11 27.9	12 1/2 31.7	12 30.4	9 22.9	16 1/2 41.9

NOTE: ALWAYS INDICATE HOSE THREAD REQUIREMENTS

All dimensions in English and Metric.